

LINFlexD Controller

SILVACO

Overview


The LINFlexD Controller is a serial communication interface designed for Local Interconnect Network (LIN) applications. The LINFlexD manages a high number of LIN messages efficiently with a minimum of CPU load. The LINFlexD supports LIN protocol versions 1.3, 2.0, 2.1, and 2.2 and provides an 8-byte buffer for transmit/receive data. The LINFlexD provides a configurable, programmable DMA interface for transmit and receive data for both LIN and UART operating modes.

LIN Mode Features

- Supports LIN protocol versions 1.3, 2.0, 2.1, and 2.2
- Supports LIN master and slave modes
- Bit rates up to 20 Kbit/s
- Classic and enhanced checksum calculation and check
- Single 8-byte buffer or FIFO for transmission and reception
- Autonomous header handling and transmit/receive data handling in slave mode
- Supports up to 16 identifiers
- DMA interface with single channels for master mode transmit and receive and configurable numbers of channels for slave mode transmit and receive

UART Mode Features

- Full-duplex communication
- Programmable baud rate up to 25 Mbit/s
- Separate clock for baud rate calculation
- DMA interface with separate channels for transmit and receive

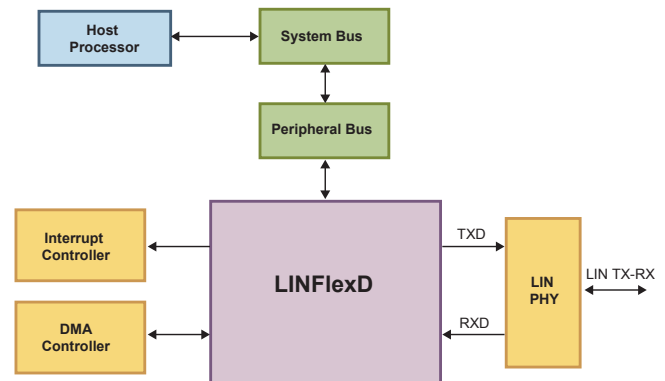

Common Features

- Fractional baud rate generator
- Three operating modes for power saving
- Loopback mode for testing

Deliverables

- Synthesizable RTL source code
- Integration testbench and tests
- Integration Guide and User Guide
- Scripts for simulation and synthesis

For more information, please contact us at ip@silvaco.com.

SILVACO

HEADQUARTERS
4701 Patrick Henry Drive, Bldg #23
Santa Clara, CA 95054



Rev 061620_02
070035

NORTH AMERICA
BRAZIL
EUROPE

sales@silvaco.com
br_sales@silvaco.com
eusales@silvaco.com

JAPAN
KOREA
TAIWAN
SINGAPORE
CHINA

jpsales@silvaco.com
krsales@silvaco.com
twsales@silvaco.com
sgsales@silvaco.com
cn_sales@silvaco.com

WWW.SILVACO.COM